

(Read this INSTRUCTION carefully before use)




HAN SEUNG AUTOMATIC

MODEL : HTS-24F - Without Memory Retention Function
HTS-24BF - Memory Retention Function

- * Operating Temp : -10° ~ 60°C
- * Capacity : 1,000W
- * Rated Voltage, Rated Current : 220V , 15A
- * Max. available "ON/OFF" times : 48 times/day
- * Use : Water purifier, sign and other electrical appliances


1. Setting a Present Time

Turn the Transparent Gauge Clockwise and set Current Time to "▼" mark

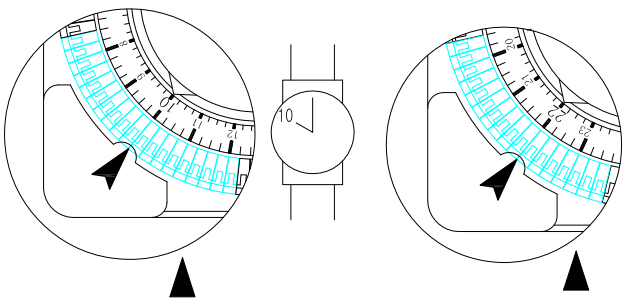

For Setting Current Time at 10:00 a.m

For Setting Current Time at 10:00 p.m (22:00)

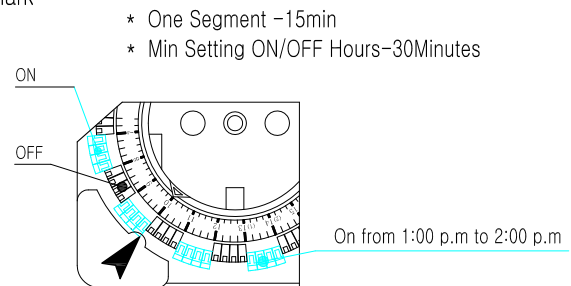


2. How to use Override Switch

ON - Always Lighting Regardless of the Location of Segment.


AT(AUTO) - Lighting Depend on the Location of the Segment

OFF - Putting out Lighting Regardless of the Location of Segment.



3. How to ON/OFF Setting

Set Segments 'ON' by Switching out as Desired Time and 'OFF' by Switching in

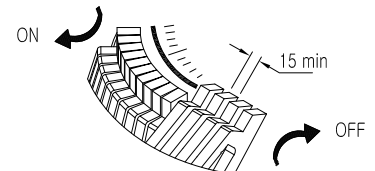

* Notice *

1. Never use in fluorescent lamp of 1000w and more.
Since there is a danger of fire when used at over rated current, make sure to use magnet switch.
2. When you set the present time, make sure to turn a clock plate clockwise for us.
3. Don't insert metals into the outlet socket.
4. Don't use in damp, wet or dusty places and in the area of vibration.
5. Don't dismantle the product and don't change wiring inside of products.
6. Our products can be affected by interference of other electromagnetic waves and field.
7. Make sure to place out of reach of children(There is a danger of electric shock)
8. As this item can be malfunctioned due to many causes, please avoid to use out of main purpose.
9. Don't use with the equipment expecting an injury to persons and damage to property.